


DISC PLOUGH

TIPS 1301/1302/1305

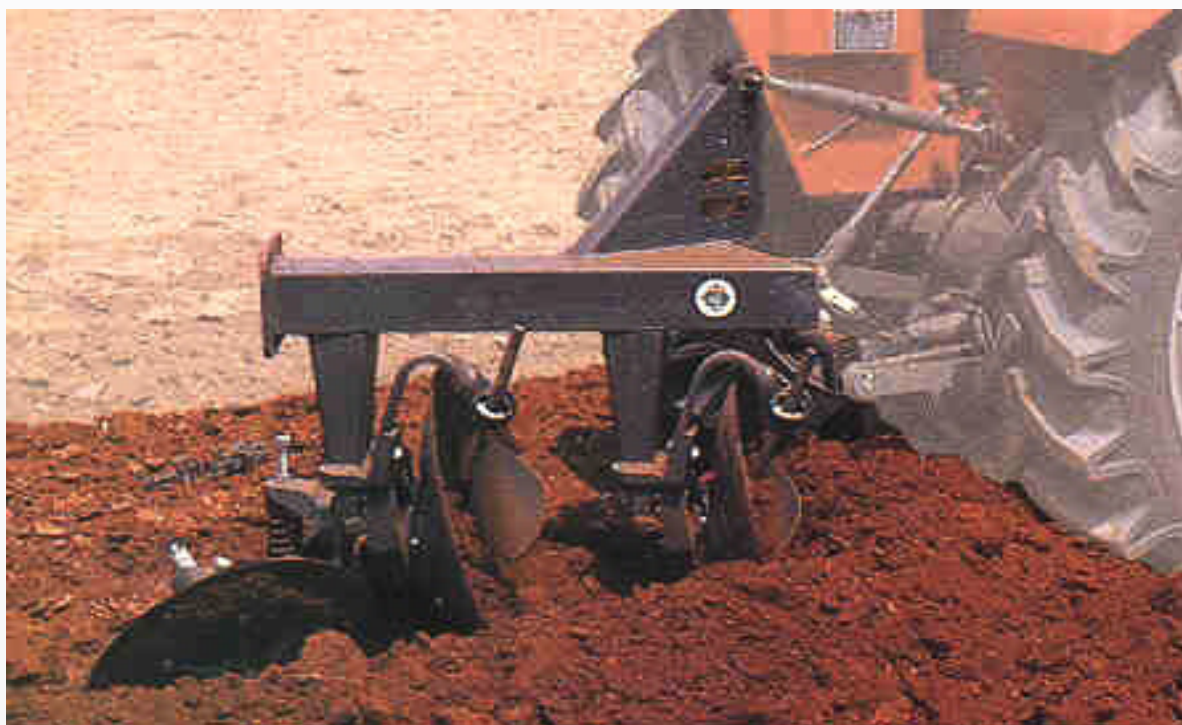

Features:

- Box frame construction provides high trash clearance.
- Side draft and thrust controlled by fully floating furrow wheel.
- Operates with tractor hydraulics and three point linkage.
- Using suitable conversion kits, 2 & 3 furrow versions can be converted into 3 & 4 furrow versions respectively.

Utilities:

- Suitable for use under most adverse conditions like hard and dry, trashy, stony or stumpy lands.
- Used for exceptionally good lands where scouring is a major problem.

Specifications:

Parameters	TIPS 1301 Disc Plough	TIPS 1302 Disc Plough	TIPS 1305 Disc Plough
No. of Furrows	2	3	4 (3+1)
Height	1118 mm	1118 mm	1118 mm
Length	1295 mm	1803 mm	2310 mm
Width	991 mm	1118 mm	1250 mm
Disc dia.	660 mm	660 mm	660 mm
Furrow Width	305 mm	305 mm	305 mm
Weight	236 Kg	320 Kg	460 Kg
Linkage Type	CAT I – 3 Point Linkage	CAT I & II – 3 Point Linkage	CAT I & II – 3 Point Linkage
Power Requirement	25 HP & Above	45 HP & Above	60 HP & Above

* The weight and working data contained in the present leaflet are supplied for information only and are not binding. Specification and size can be altered as part of ongoing product modification / improvement